

MEDIA CONTROL MIXER

WITH BLUETOOTH VOLUME CONTROL

MIC / LINE AUDIO MIXER IN A TWO GANG ELECTRICAL BOX



Features:

- Manual Control of Bluetooth Audio
- LED Screen for Digital Controls of Media and Bluetooth
- Simple Install and Easy to Use
- For Classrooms, Showrooms, Conference Rooms & Retail
- A Perfect Combination with the OWI Amplified Speaker Line of Products
- Quiet, Reliable Performance
- MC4 Carton Includes
 - » One (1) Each MC4
 - » One (1) UL Listed, Efficiency Level V (Energy Star) 15 V DC Power Supply
 - » Four (4) Each 6:32 Truss Head Screws)
 - » Four (4) Plastic Washers
 - » Remote Control
- 2 Outputs for Flexibly of Applications
- Factory Support for Lifetime of Product

Specifications:

MODEL NUMBER	MC4-BT
Description	Mic / Line Audio Mixer in a Two Gang Electrical Box with CAT5 Connection
Power	15 V DC @ 170 ma
Channels	Four (4) Channels Plus 1 on the face
Voltage Levels	Line (-14 to +4 dBm) Mic (-55 dBm)
Outputs	Three (3) Outputs
Outputs Types	Balanced, 3.5 Mini Jack, and CAT 5
Output Channels	One (1) Each Euro Block One (1) Each 3.5 Mini Jack One (1) Each RJ45 Connector
Input Types	Primary, Front Panel Controlled Secondary, Rear
Input Types	1 each – 3.5 Stereo Mini Jack on the Front Panel 1 each – 3.5 Stereo Mini Jack on the Rear Panel 2 each – Balanced Fixed Wire on a Euro Block in the rear 1 each – Bluetooth 1 each – USB 1 each – SD CARD
Mic / Line Inputs	Channel 3 & 4 mic / line switch on Rear for Input #3 & 4
Dimensions	7 inches x 5 inches x 1.88 inches overall (1.25 inches off the wall)

• Media Control Mixer - MC4-BT

- » Manual Control of Bluetooth Audio (See Volume Control at Right)
- » Gangbox Not Included
- » 4 Inputs Total – 3 Each Back Panel / 1 Each Front Panel
- » Selectable Line or Mic Level Input Slider (CH 3 & 4)
- » 1 Each 3.5 Mini Front Inputs
- » Four Sets of Slider Level Controls for Easy Mix and Instant Control
- » Balanced Line Output
- » RJ45 / CAT 5 Connectivity with an OWI Amplified Speaker


MC4-BT

MEDIA CONTROL MIXER

WITH BLUETOOTH VOLUME CONTROL
MIC / LINE AUDIO MIXER IN A TWO GANG
ELECTRICAL BOX




Perfect for classroom, showroom,
conference room or retail store applications

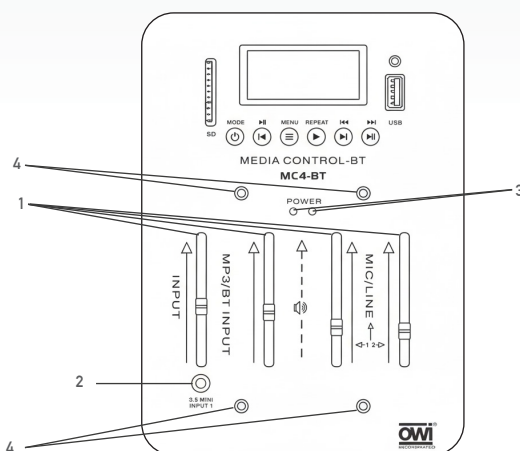


MC4-BT – Front Panel Features:

- ① Four Sliders (Line Level or Mic Level Inputs)
- ② 3.5 Mini Input Jacks (Channel 1) Jacks are Stereo and Combine to Mono at the Jack.
- ③ LED Power Indicators
- ④ Four Screws / Washers

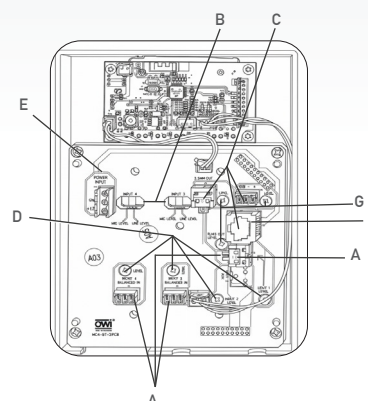

MC4-BT– Back Panel Features:

- A 3 EACH INPUTS – 2 balanced Euro Style Connector and 1 Stereo 3.5 Mini Jack Connector
- B Mic or Line Switch for Inputs 3 & 4
- C Outputs – Balanced, 3.5 Mini Jack, and RJ45 for OWI Mini Amplifiers
- D Gain Control for Inputs 1, 2, 3, and 4
- E 15V DC Power Input
- F RJ45 LINE OUTPUT – Connects to OWI AMP Speakers only
- G Volume Control for Outputs

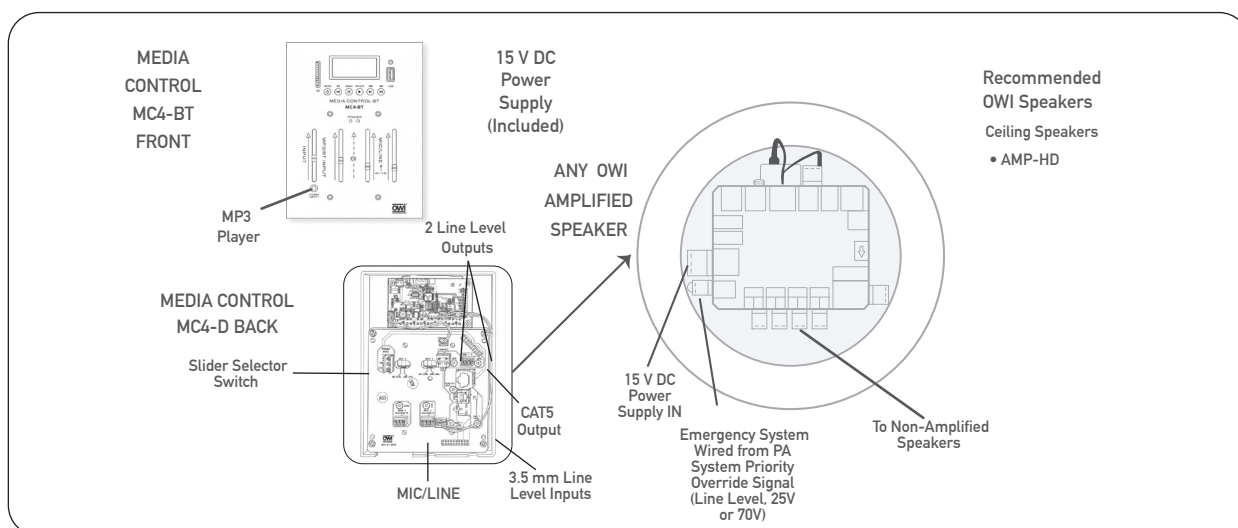

OWI Incorporated
17141 Kingsview Ave.,
Carson, CA 90746 U.S.A.
ph.: 310.515.1900
email: info@owi-inc.com



www.owi-inc.com
Specification sheets available for download
owi-inc.com

rev 092418