


# **2X2AMP-BT2S61 – Two Source, Amplified, 6.5”, Drop Ceiling Speaker with Bluetooth on a 2X2 Tile – One Speaker Package**

Two Source, 6.5” Amplified Drop Ceiling Speaker with Bluetooth on a 2X2 tile and backcan assembly delivers up to 40 watts power directly to the speaker. Each powered speaker ([2X2AMP-BT2S61](#)) can drive three additional speakers ([2X2IC6NA](#)). One line can drive up to 10 self-amplified speakers. Lower noise feature and protection from shorts and overheating. 15 Volt DC Level 5 [power supply](#) included and optional [Volume Controls](#) are available. Available also in models without Bluetooth features.

One Speaker assembly consisting of the following;

- 1) One (1) each ([2X2AMP-BT2S61](#)) 6.5” amplified speaker with one (1) each [Backcan](#) enclosure and one (1) each 2X2 tile assembled.
- 2) One (1) each UL Listed, Level 5, 15 VDC power supply ([PS15VDC35AL5](#))

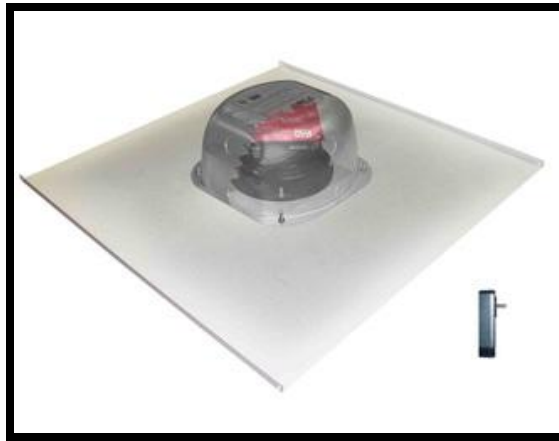

## **Features:**

- Built onto the OWI [IC6](#) In-Ceiling Speakers on a 2X2 Tile and backcan assembly
- 2 Line Level Input/Sources
- Up to 40 Watts of Power – right at the speaker
- With Priority Override Features
- Balanced Line Level Output
- Bluetooth Features
- With a 3.5 mm Stereo Jack Line Input
- 15 Volt DC [power supply](#) (UL Listed-Level 5) included
- Protected from shorts and overheating
- Lower Noise Feature
- Fast and easy – install in the field
- Optional [Stereo/mono volume controls](#) available
- Available in 1, 2 and 4 speaker packages

## **Available in the following complete install packages:**

- |                                  |  |
|----------------------------------|--|
| <a href="#">2X2AMP-BT2S61SVC</a> | - One Speaker Package with Volume Control  |
| <a href="#">2X2AMP-BT2S62</a>    | - Two Speaker Package                      |
| <a href="#">2X2AMP-BT2S62SVC</a> | - Two Speaker Package with Volume Control  |
| <a href="#">2X2AMP-BT2S64</a>    | - Four Speaker Package                     |
| <a href="#">2X2AMP-BT2S64SVC</a> | - Four Speaker Package with Volume Control |




# **2X2AMP-BT2S62 – Two Source, Amplified, 6.5”, Drop Ceiling Speaker with Bluetooth on a 2X2 Tile – Two Speaker Package**

Two Source, 6.5” Amplified Drop Ceiling Speaker with Bluetooth on a 2X2 tile and backcan assembly delivers up to 40 watts power directly to the speaker. Each powered speaker ([2X2AMP-BT2S61](#)) can drive three additional speakers ([2X2IC6NA](#)). One line can drive up to 10 self-amplified speakers. Lower noise feature and protection from shorts and overheating. 15 Volt DC Level 5 [power supply](#) included and optional [Volume Controls](#) are available. Available also in models without Bluetooth features.

Two Speaker assembly consisting of the following;

- 1) One (1) each ([2X2AMP-BT2S61](#)) 6.5” amplified speaker with one (1) each [Backcan](#) enclosure and one (1) each 2X2 tile assembled.
- 2) One (1) each UL Listed, Level 5, 15 VDC power supply ([PS15VDC35AL5](#))
- 3) One (1) each non-amplified speaker on a 2X2 tile ([2X2IC6NA](#))

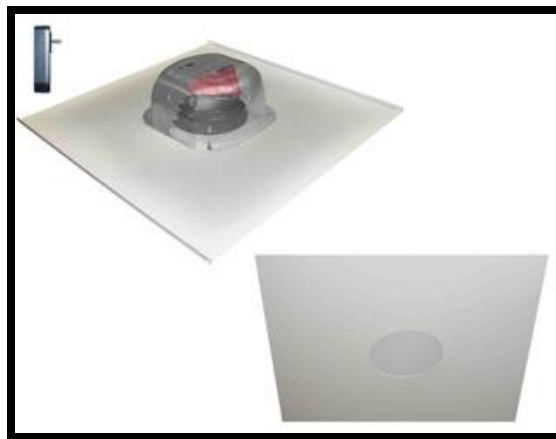

## **Features:**

- Built onto the OWI [IC6](#) In-Ceiling Speakers on a 2X2 Tile and backcan assembly
- 2 Line Level Input/Sources
- Up to 40 Watts of Power – right at the speaker
- With Priority Override Features
- Balanced Line Level Output
- Bluetooth Features
- With a 3.5 mm Stereo Jack Line Input
- 15 Volt DC [power supply](#) (UL Listed-Level 5) included
- Protected from shorts and overheating
- Lower Noise Feature
- Fast and easy – install in the field
- Optional [Stereo/mono volume controls](#) available
- Available in 1, 2 and 4 speaker packages

## **Available in the following complete install packages:**

- |                                  |  |
|----------------------------------|--|
| <a href="#">2X2AMP-BT2S61</a>    | - One Speaker Package                      |
| <a href="#">2X2AMP-BT2S61SVC</a> | - One Speaker Package with Volume Control  |
| <a href="#">2X2AMP-BT2S62SVC</a> | - Two Speaker Package with Volume Control  |
| <a href="#">2X2AMP-BT2S64</a>    | - Four Speaker Package                     |
| <a href="#">2X2AMP-BT2S64SVC</a> | - Four Speaker Package with Volume Control |




# **2X2AMP-BT2S64 – Two Source, Amplified, 6.5”, Drop Ceiling Speaker with Bluetooth on a 2X2 Tile – Four Speaker Package**

Two Source, 6.5” Amplified Drop Ceiling Speaker with Bluetooth on a 2X2 tile and backcan assembly delivers up to 40 watts power directly to the speaker. Each powered speaker ([2X2AMP-BT2S61](#)) can drive three additional speakers ([2X2IC6NA](#)). One line can drive up to 10 self-amplified speakers. Lower noise feature and protection from shorts and overheating. 15 Volt DC Level 5 [power supply](#) included and optional [Volume Controls](#) are available. Available also in models without Bluetooth features.

Four Speaker assembly consisting of the following;

- 1) One (1) each ([2X2AMP-BT2S61](#)) 6.5” amplified speaker with One (1) each [Backcan](#) enclosure and one (1) each 2X2 tile assembled.
- 2) One (1) each UL Listed, Level 5, 15 VDC power supply ([PS15VDC35AL5](#))
- 3) Three (3) each non-amplified Speaker on a 2X2 tile ([2X2IC6NA](#))

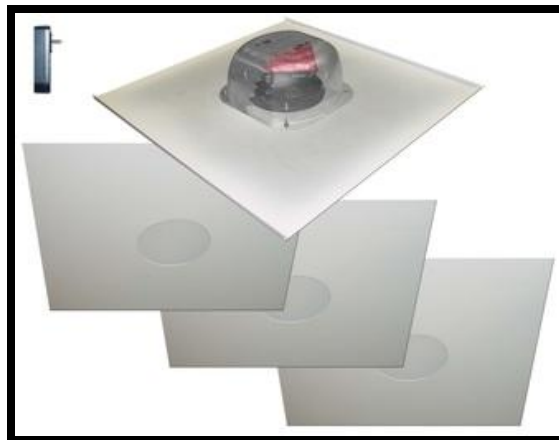

## **Features:**

- Built onto the OWI [IC6](#) In-Ceiling Speakers on a 2X2 Tile and backcan assembly
- 2 Line Level Input/Sources
- Up to 40 Watts of Power – right at the speaker
- With Priority Override Features
- Balanced Line Level Output
- Bluetooth Features
- With a 3.5 mm Stereo Jack Line Input
- 15 Volt DC [power supply](#) (UL Listed-Level 5) included
- Protected from shorts and overheating
- Lower Noise Feature
- Fast and easy – install in the field
- Optional [Stereo/mono volume controls](#) available
- Available in 1, 2 and 4 speaker packages

## **Available in the following complete install packages:**

- |                                  |  |
|----------------------------------|--|
| <a href="#">2X2AMP-BT2S61</a>    | - One Speaker Package                      |
| <a href="#">2X2AMP-BT2S61SVC</a> | - One Speaker Package with Volume Control  |
| <a href="#">2X2AMP-BT2S62</a>    | - Two Speaker Package                      |
| <a href="#">2X2AMP-BT2S62SVC</a> | - Two Speaker Package with Volume Control  |
| <a href="#">2X2AMP-BT2S64SVC</a> | - Four Speaker Package with Volume Control |

