



MERCURY

HIGH CEILING PENDANT SPEAKER FOR
WIDE DISPERSION WITH 6" WOOFER



Features:

- Professional, Commercial Speaker Engineered for High Ceilings and Greater Sound Coverage
- Selectable Switch – 70/25/100 V / 8 Ω
- 70 V Transformer Tap – 2.5, 5, 10, 20 W (M6720)
20, 30, 40, 50 W (M6750)
- 25 V Transformer Tap – 0.31, 0.63, 1.25, 2.5 W (M6720)
2.5, 3.75, 5, 6.25 W (M6750)
- Dynamic 360° Sound – 180° Dispersion
- More Dynamic Sound Out of One Speaker
- Mounting Bracket Included
- Easy Installation
- Fixed or Free Hanging


Specifications:

MODEL NUMBER	M6720	M6750
Description	1 ea. 6.5" Polypropylene Woofer 4 ea. 2.5" Midrange 1 ea. 1" Tweeter 4 Bass Ports	1 ea. 6.5" Polypropylene Woofer 4 ea. 2.5" Midrange 1 ea. 1" Tweeter 4 Bass Ports
Covered Outdoor	Yes	Yes
Impedance	Selectable 70/25/100 V / 8Ω	Selectable 70/25/100 V / 8Ω
Sensitivity (1 W / 1 M)	90 dB	90 dB
Max Power @ 8 Ω	100 W	100 W
Max Power	20 W	50 W
70 V Transformer Taps	2.5, 5, 10, 20 W	20, 30, 40, 50 W
25 V Transformer Taps	0.31, 0.63, 1.25, 2.5 W	2.5, 3.75, 5, 6.25 W
100 V Transformer Taps	5, 10, 20 W	40 W
Frequency Response	65 Hz – 20 kHz	65 Hz – 20 kHz
Crossover	12 dB @ 4 kHz and 7 kHz (3-Way)	12 dB @ 4 kHz and 7 kHz (3-Way)
Dispersion	360° H x 180° V	360° H x 180° V
Woofer Size	6.5" – 1 ea.	6.5" – 1 ea.
Woofer Material	Polypropelene	Polypropelene
Midrange Size	2.5 – 4 ea.	2.5 – 4 ea.
Midrange Material	Paper	Paper
Tweeter Size	1 ea.	1 ea.
Tweeter Material	Silk	Silk
Bass Ports	4 ea.	4 ea.
Enclosure	Polyethylene	Polyethylene
Grill Material	Powder Coated Mesh Wire	Powder Coated Mesh Wire
Dimensions	15" D x 10" H	15" D x 10" H
Net Weight (Unit Only)	8.2 Lbs.	9.5 Lbs.
Total Weight	12.3 Lbs.	13.6 Lbs.
Color(s)	Black, White	Black, White
Mount Hardware	Safety Cable Included	Safety Cable Included
Paintable	No	No
Warranty	5 Years	5 Years



MERCURY



HIGH CEILING PENDANT SPEAKER FOR WIDE DISPERSION WITH 6" WOOFER



High Ceiling Applications in Retail Stores, Churches, Night Clubs, Sports Bars, Gyms, Restaurants, Hotels, Atriums and Transportation Centers.




WIDE DISPERSION

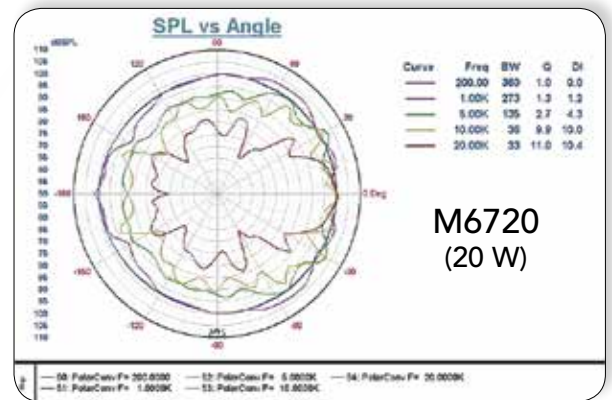

M6720
(20 W)

INSTALLATION GUIDE ± 3 dB													
Height of the Speaker (Ft.)	8'	9'	10'	11'	12'	13'	14'	15'	16'	17'	18'	19'	20'
Distance between Speakers (Ft.)	25	30	36	41	47	52	58	63	69	74	80	85	91
Coverage in Square Feet (Ft ²) per Speaker	491	707	1018	1320	1735	2124	2642	3117	3739	4301	5027	5675	6504

Shown above: figure for ± 3 dB total variation installations
Speaker height is measured from the tweeter to the listener's ear height of 3' 6" from the floor

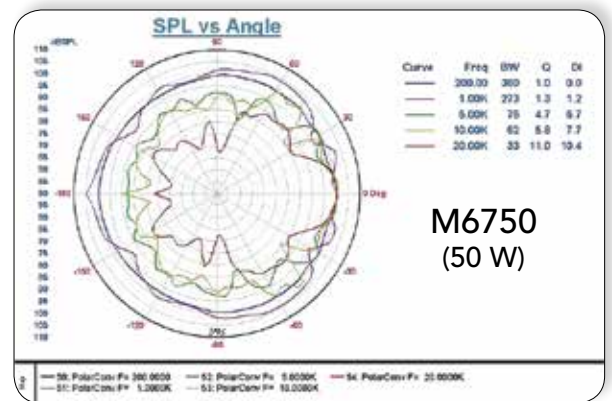

M6750
(50 W)



OWI Incorporated
17141 Kingsview Ave.,
Carson, CA 90746 U.S.A.
ph.: 310.515.1900
toll free: 800.638.1694
fax: 310.515.1606
email: info@owi-inc.com



www.owi-inc.com
Specification sheets available for download
owi-inc.com/mercury