

Model: M8764/MSUB10

MERCURY

8" PENDANT SPEAKER &
10" SUBWOOFER

Engineered for: High Ceiling and Greater Sound Coverage; Retail Stores; Churches; Night Clubs; Sports Bars; Gyms; Restaurants; Hotels; Atriums; and Transportation Centers.


- Professional, Commercial Speaker
- Dynamic 360° Sound – 180° Dispersion
- Easy Installation – High Ceiling Applications
- Two 20' Grippler Seismic Restraint Cables Included
- Three Cable Holes in Mount Provide Flexibility & Safety
- Available in Black or White

Model M8764 Features:

- 70/25/100 V/ 8 Ω Selectable
- One 8" Woofer, Four Ea. 3" Midrange Tweeters, One 1" Tweeter, Two Bass Ports
- 8, 16, 32 & 64 W Power Taps at 70 V
- 16, 32 & 64 W Power Taps at 100 V
- 1, 2, 4 & 8 W Power Taps at 25 V

Model MSUB10 Features:

- 70/25/100 V/ 4 Ω Selectable
- One 10" Woofer, One Bass Port
- 300 W Max. Power at 4 Ω
- 8, 16, 32 & 64 W Power Taps at 70 V
- 16, 32 & 64 W Power Taps at 100 V
- 1, 2, 4 & 8 W Power Taps at 25 V

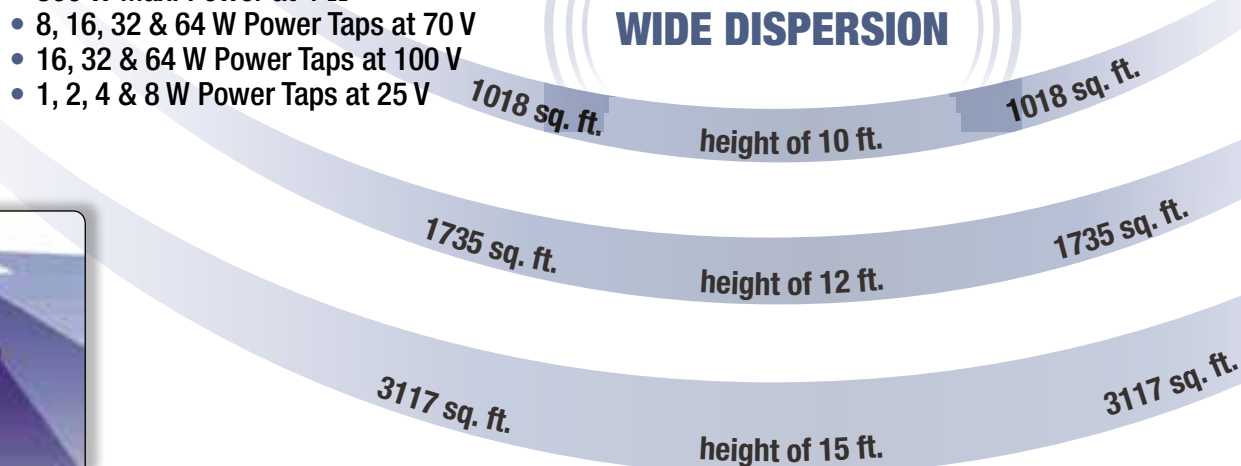

owi-inc.com/mercury.html

OWI[®]
OWI Incorporated
Established 1978

Model: M8764/MSUB10

MERCURY

8" PENDANT SPEAKER & 10" SUBWOOFER

70V/25V/100V

WIDE DISPERSION







GENERAL SPECS	M8764	MSUB10
Description:	1 ea. 8" Paper Cone Woofer 4 ea. 3" Midrange 1 ea. 1" Tweeter 2 Bass Ports	1 ea. 10" Paper Cone Subwoofer 1 Bass Port
Covered Outdoor:	Yes	Yes
Impedance:	Selectable 70/25/100V/8 Ω	Selectable 70/25/100V/4 Ω
Sensitivity (1W/1M):	93 dB	114 dB @ Near Field
Max SPL dB @ 1M:	115 dB	139 dB @ Near Field
Max Power:	150 W @ 8 Ω	300 W @ 4 Ω
Transformer Taps @70V:	8, 16, 32 & 64 Watts	8, 16, 32 & 64 Watts
Transformer Taps @25V:	1, 2, 4 & 8 Watts	1, 2, 4 & 8 Watts
Transformer Taps @100V:	16, 32 & 64 Watts	16, 32 & 64 Watts
Frequency Response:	60 Hz – 20 kHz	40 Hz – 300 Hz
Freq. Resp. (± 3 dB):	85 Hz – 20 kHz	70 Hz – 300 Hz
Freq. Resp. (± 10 dB):	70 Hz – 20 kHz	60 Hz – 300 Hz
Crossover:	12 dB @ 900 Hz & 5K Hz (3-Way)	12 dB @ 300 Hz
Dispersion:	360° H x 180° V	360° H x 180° V
Woofer Size:	8" – 1 Each	10" – 1 Each
Woofer Material:	Paper	Paper
Midrange Size:	3" - 4 Each	-
Midrange Material:	Paper	-
Tweeter Size:	1" - 1 Each	-
Tweeter Material:	Aluminum	-
Bass Ports:	2 Each	1 Each
Enclosure:	Polyethylene	Polyethylene
Grill Material:	Powder Coated CRS	Powder Coated CRS
Dimensions:	19.5" Diameter x 12" H	19.5" D x 12" H
Weight:	33 Lbs.	33 Lbs.
Color(s):	Black, White	Black, White
Mounting Hardware:	Gripple Cable 20 Ft. (2 ea.)	Gripple Cable 20 Ft. (2 ea.)
Paintable:	No	No



NEW MOUNT & BACK PLATE DESIGN

- Two 20' Gripple Seismic Restraint Wires provided for optimum safety
- Allows flexibility in mounting to various ceiling situations. Placement of speaker can be EXACT!
- NEW detachable speaker input plug
- Selectable Switch

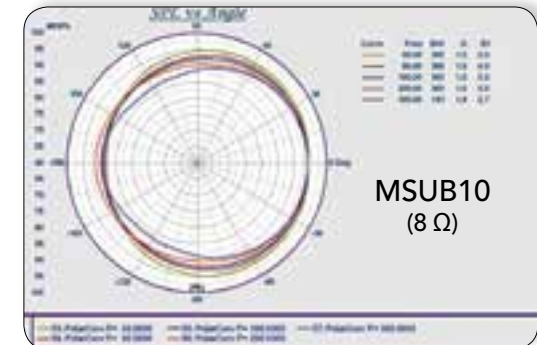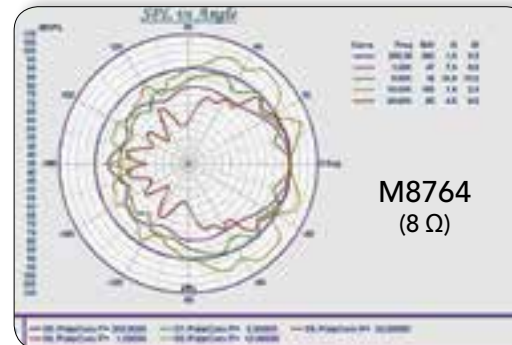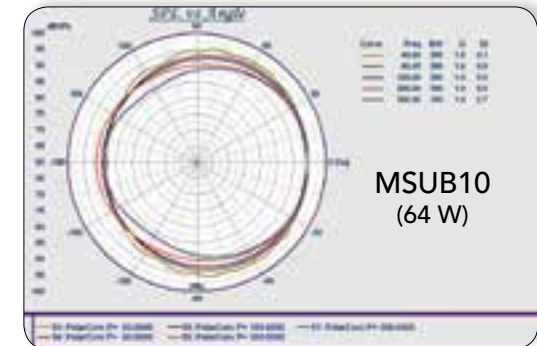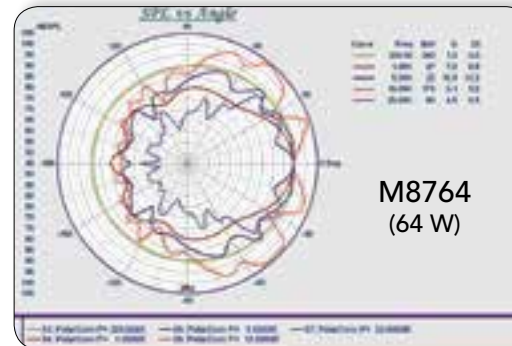

THE INNOVATOR OF PENDANT SPEAKERS!

17141 Kingsview Ave. Carson CA 90746 USA | ph.: 310.515.1900 | toll free: 800.638.1694
fax: 310.515.1606 | web: www.owi-inc.com | email: info@owi-inc.com

072117

INSTALLATION GUIDE ±3 dB

Height of the Speaker (Ft.)	8'	9'	10'	11'	12'	13'	14'	15'	16'	17'	18'	19'	20'
Distance between Speakers (Ft.)	25	30	36	41	47	52	58	63	69	74	80	85	91
Coverage in Square Feet (Ft ²) per Speaker	491	707	1018	1320	1735	2124	2642	3117	3739	4301	5027	5675	6504

Shown above: figure for +3 dB total variation installations
Speaker height is measured from the tweeter to the listener's ear height of 3' 6" from the floor