



Saturn Pendant
5" Pendant




Mercury Pendant
6" Pendant, 8" Pendant
or 10" Subwoofer



SATURN & MERCURY

360° SOUND – PENDANT SPEAKERS

- Dynamic 360° Sound / 180° Dispersion
- Selectable Switch
- 5-Way Speakers
- Fixed or Free Hanging
- Available in Black or White
- 5 Year Warranty

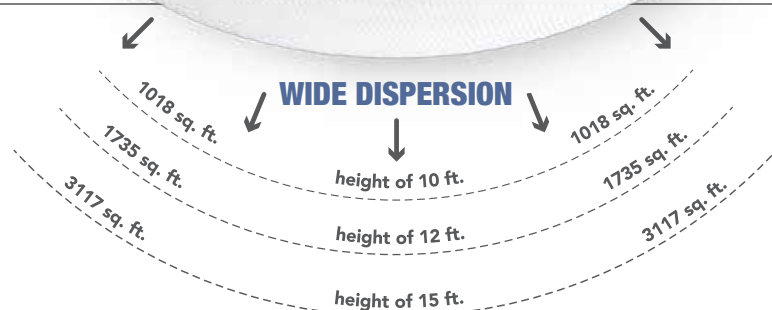

Specifications:

MODEL NUMBER	SAT360 (5")	M6720 (6.5")	M6750 (6.5")	M8764 (8")	MSUB10 (10")
Description	5-Way, 70 V & 8 Ω Combo 1 ea. 5" Polypropylene Woofer 4 ea. 0.5" PEI Tweeter with Overload Protection	1 ea. 6.5" Polypropylene Woofer, 4 ea. 2.5" Midrange, 1 ea. 1" Tweeter, 4 Bass Ports	1 ea. 6.5" Polypropylene Woofer, 4 ea. 2.5" Midrange, 1 ea. 1" Tweeter, 4 Bass Ports	1 ea. 8" Paper Cone Woofer, 4 ea. 3" Midrange, 1 ea. 1" Tweeter, 2 Bass Ports	1 ea. 10" Paper Cone Subwoofer, 1 Bass Port
Outdoor / Indoor	Yes	Covered Outdoor	Covered Outdoor	Covered Outdoor	Covered Outdoor
Impedance	Selectable 25/70/100 V & 8 Ω	Selectable 25/70/100 V & 8 Ω	Selectable 25/70/100 V & 8 Ω	Selectable 25/70/100 V & 8 Ω	Selectable 25/70/100 V & 4 Ω
Sensitivity (1 W / 1 M)	89 dB	90 dB	90 dB	93 dB	114 dB @ Near Field
Max SPL dB @ 1 M	–	–	–	115 dB	139 dB @ Near Field
Max Power @ 8 Ω	65 W @ 8 Ω	100 W @ 8 Ω	100 W @ 8 Ω	150 W @ 8 Ω	300 W @ 4 Ω (64 W)
Max Power	–	20 W	50 W	64 W	64 W
70 V Tap Settings	3, 6, 12, 25 & 50 W	2.5, 5, 10, 20 W	20, 30, 40, 50 W	8, 16, 32, 64 W	8, 16, 32, 64 W
25 V Tap Settings	.375, .75, 1.5, 3.2, 6.25 W	0.31, 0.63, 1.25, 2.5 W	2.5, 3.75, 5, 6.25 W	1, 2, 4, 8 W	1, 2, 4, 8 W
100 V Tap Settings	6, 12, 24, 50 W	5, 10, 20 W	40, 50 W	16, 32, 64 W	16, 32, 64 W
Nominal Power	50 W	100 W	100 W	150 W	300 W
Frequency Response	115 Hz - 12 kHz	100 Hz – 20 kHz	100 Hz – 20 kHz	60 Hz – 20 kHz 85 Hz – 20 kHz (±3 db) 70 Hz – 20 kHz (±10 db)	40 Hz – 300 kHz 70 Hz – 300 kHz (±3 db) 60 Hz – 300 kHz (±10 db)
Crossover	6 dB @ 5 kHz	12 dB @ 4 kHz and 7 kHz (3-Way)	12 dB @ 4 kHz and 7 kHz (3-Way)	12 dB @ 900 Hz & 5 kHz (3-Way)	12 dB @ 300 Hz
Dispersion	360° H x 180° V	360° H x 180° V	360° H x 180° V	360° H x 180° V	360° H x 180° V
Woofer Size	5" – 1 Each	6.5" – 1 Each	6.5" – 1 Each	8" – 1 Each	10" – 1 Each
Woofer Material	Polypropylene	Polypropylene	Polypropylene	Paper	Paper
Midrange Size	N/A	2.5" – 4 Each	2.5" – 4 Each	3" – 4" Each	N/A
Midrange Material	N/A	Paper	Paper	Paper	N/A
Tweeter Size	0.5" – 4 Each	1"	1"	1" – 1 Each	N/A
Tweeter Material	PEI	Silk	Silk	Aluminum	N/A
Bass Ports	N/A	4 Each	4 Each	2 Each	1 Each
Enclosure	Polyethylene	Polyethylene	Polyethylene	Polyethylene	Polyethylene
Grill Material	Powder Coated Mesh Wire	Powder Coated Mesh Wire	Powder Coated Mesh Wire	Powder Coated CRS	Powder Coated CRS
Dimensions (L x W x H)	9" Diameter x 8" Height	15" Diameter x 10" H	15" Diameter x 10" H	19.5" Diameter x 12" H	19.5" Diameter x 12" H
Net Weight	5.46 Lbs.	8.2 Lbs.	9.5 Lbs.	33 Lbs.	27 Lbs.
Total Weight	8.03 Lbs.	12.3 Lbs.	13.6 Lbs.	37 Lbs.	31 Lbs.
Color(s)	Black or White	Black or White	Black or White	Black or White	Black or White
Mounting Hardware	1.2" Dia. x 11.5" PVC Included	Safety Cable Included	Safety Cable Included	Gripple Cable 20 Ft. (2 ea)	Gripple Cable 20 Ft. (2 ea)
Paintable	No	No	No	No	No












SATURN & MERCURY

360° SOUND –PENDANT SPEAKERS




Easy Installation for High Ceiling Applications Including Retail Stores; Churches; Night Clubs; Sports Bars; Gyms; Restaurants; Hotels; Atriums; and Transportation Centers.

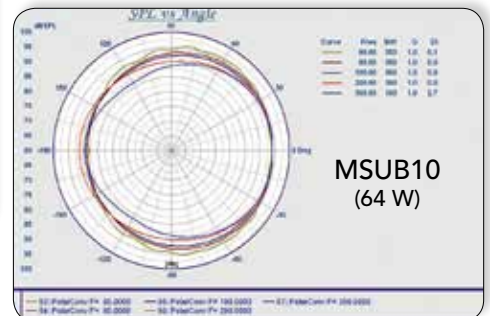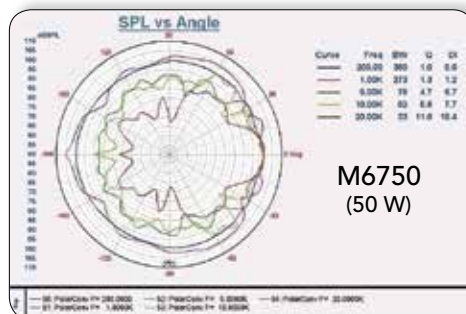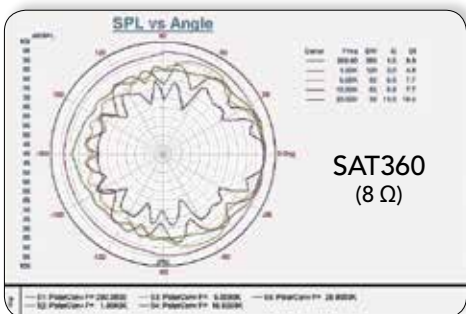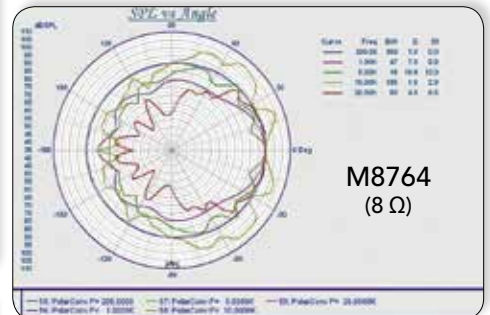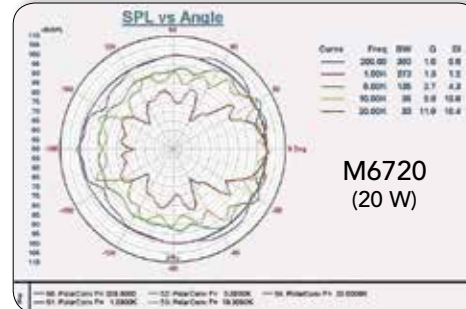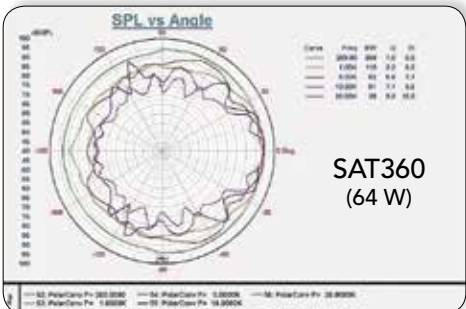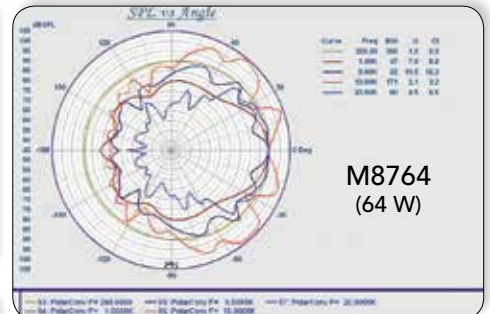

INSTALLATION GUIDE ±3 dB													
Height of the Speaker (Ft.)	8'	9'	10'	11'	12'	13'	14'	15'	16'	17'	18'	19'	20'
Distance between Speakers (Ft.)	25	30	36	41	47	52	58	63	69	74	80	85	91
Coverage in Square Feet (Ft ²) per Speaker	491	707	1018	1320	1735	2124	2642	3117	3739	4301	5027	5675	6504

Shown above: figure for +3 dB total variation installations
Speaker height is measured from the tweeter to the listener's ear height of 3' 6" from the floor

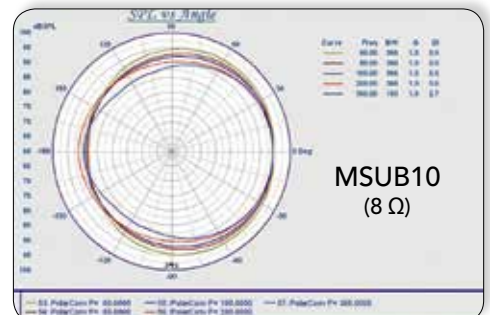

OWI Incorporated
17141 Kingsview Ave.,
Carson, CA 90746 U.S.A.
ph.: 310.515.1900
toll free: 800.638.1694
fax: 310.515.1606
email: info@owi-inc.com



www.owi-inc.com
Specification sheets available for download
owi-inc.com/pendant-speakers1

