

# TYPICAL HUM ELIMINATOR INSTALLATION

## Model AMPHUMELM



Used for: Projector Line Outputs  
Computer Line Out

Under Boardroom tables  
(for Audio Outputs from a Computer)

Television Line Output  
For every Wall Plate providing Hum Immunity




COMPUTER



PROJECTOR

Ground/Shield switch  
from primary to secondary.  
Leave it 99% of the time.  
Slide it only if hum is  
further reduced.

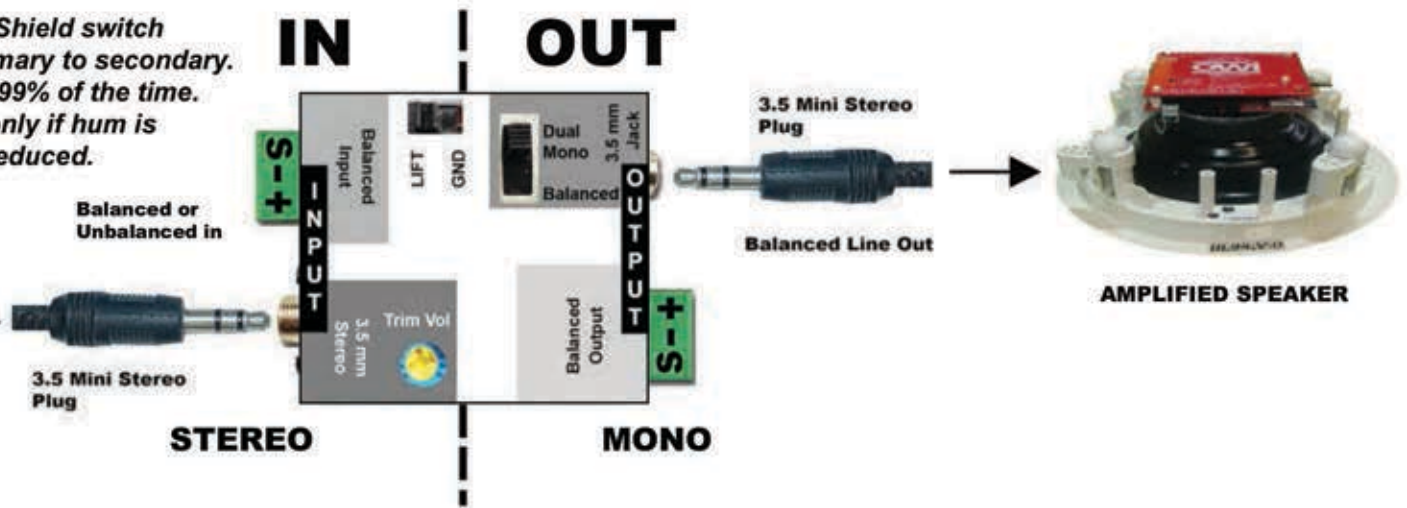

AV Wall Plate



Place the AMPHUMELM  
behind the wall plate

BALANCED LINE IN



AMPLIFIED SPEAKER

# OWI HUM ELIMINATOR

## AMPHUMELM WIRING DIAGRAMS

From an  
Audio Source


→ **IN**

**OUT** →


To Amplified Speaker

### A. Stereo Unbalanced Input


*Ground/Shield switch from primary to secondary. (Leave it 99% of the time. Slide it only if hum is further reduced.)*

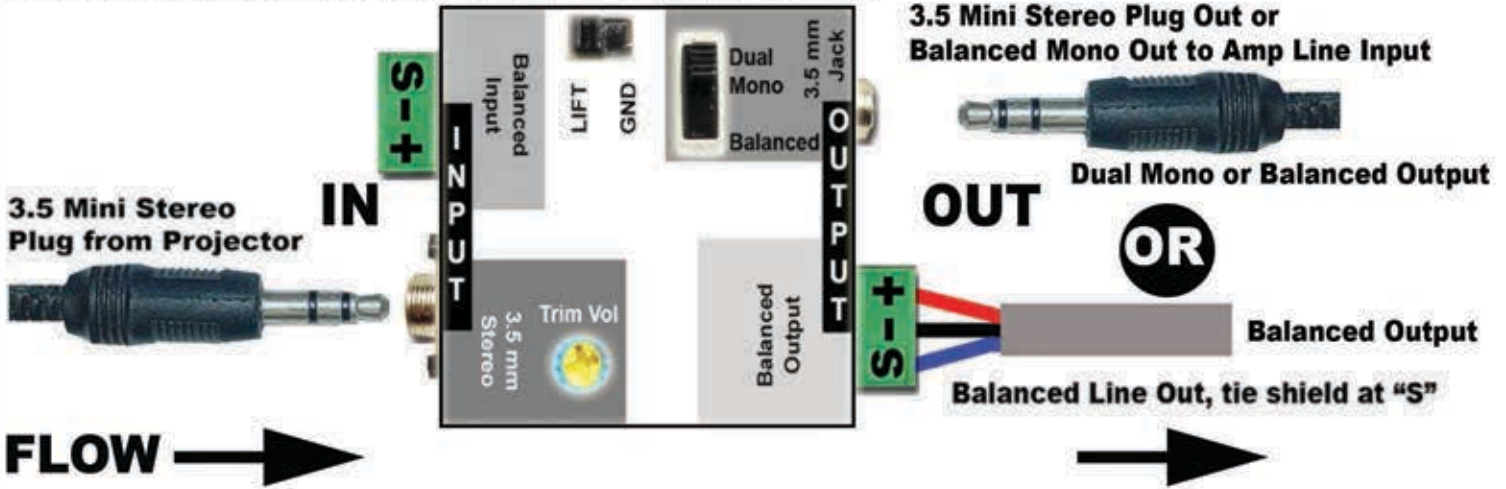

### B. Balanced Input

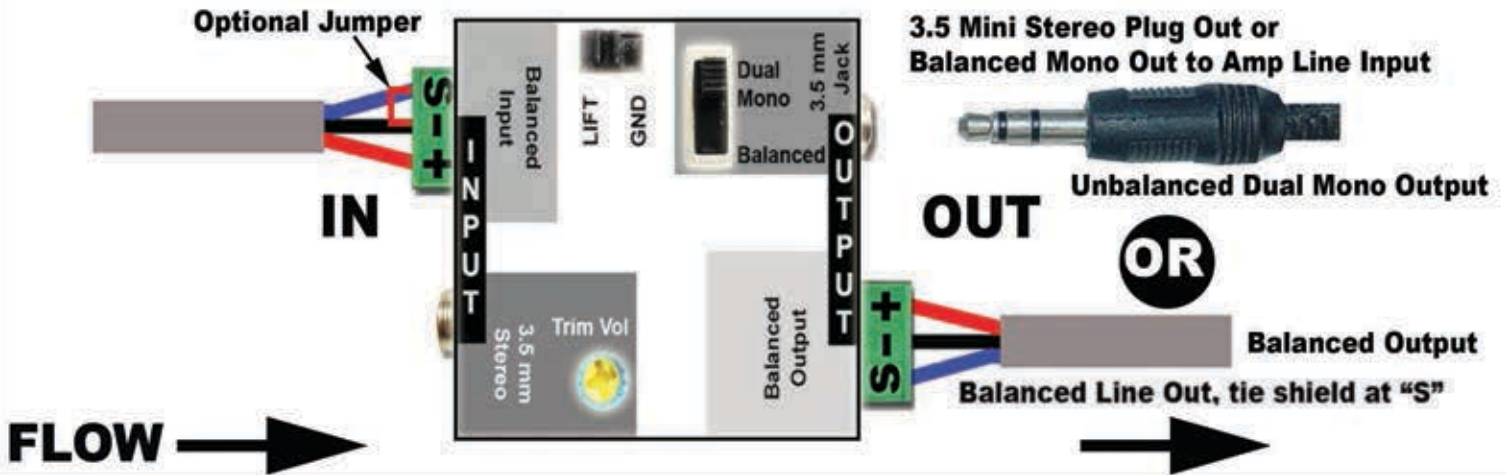

### C. Balanced Input To Unbalanced Output Convert to Unbalanced Output

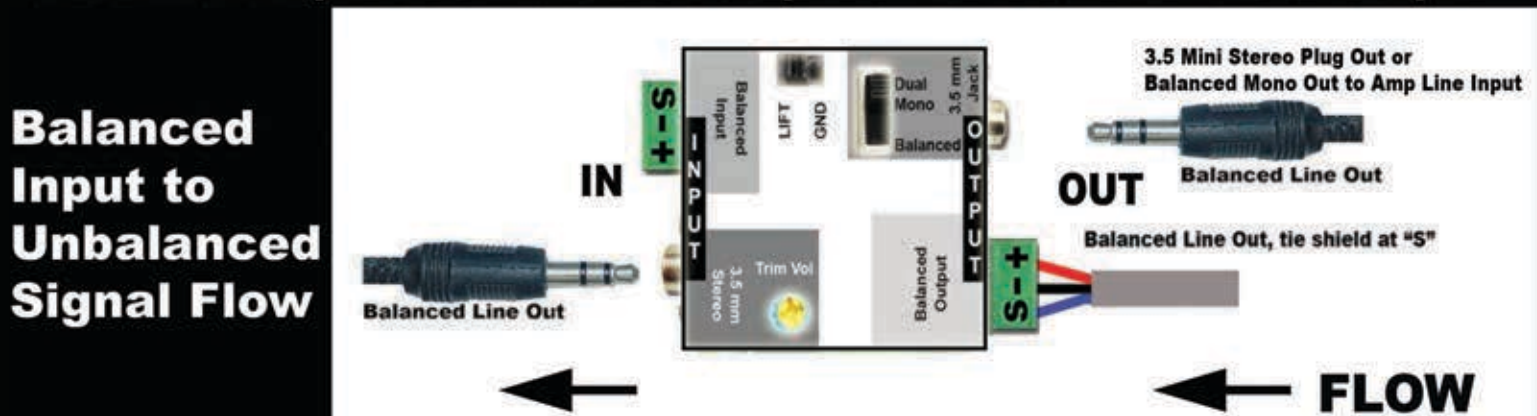

\* Please Note Flow.