

# ALL WEATHER PROTECTION SPEAKER "WEATHERIZED"

Model: 703i

Surface Mount Speaker

70  
volt  
8 $\Omega$



## COMMERCIAL/RESIDENTIAL

- Professional Commercial or Residential Speaker
- Selectable Switch – 70 V and 8  $\Omega$  Combination
- 70 V Transformer Taps – 2.5, 5, 10, 15 W
- Maximum Power at 8  $\Omega$  – 100 W
- Weatherized Aluminum Casing, Grill and Bracket
- Ceiling or Wall Mount Possibilities with the Included "U" Mount Bracket
- Ideal for Outdoor Malls, Hotels, Spas, Restaurants, Patios, Amusement Parks
- Dimensions (H x W x D): 7" x 4.5" x 4"
- Black or White
- 5 Year Warranty



## SNOW



## WATER


**Envirōtainment™**

**OWI®**  
OWI Incorporated  
Established 1978  
[www.owi-inc.com](http://www.owi-inc.com)

# ALL WEATHER PROTECTION SPEAKER

## "WEATHERIZED"


Model: 703i Surface Mount Speaker

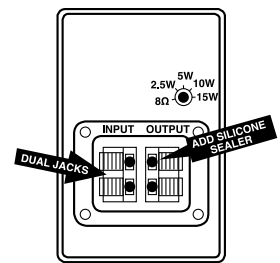

- Professional Commercial or Residential Speaker
- Selectable Switch – 70 V and 8 Ω Combination
- 70 V Transformer Taps – 2.5, 5, 10, 15 W
- Weatherized Aluminum Casing, Grill and Bracket
- Ceiling or Wall Mount Possibilities with the Included "U" Mount Bracket
- Ideal for Outdoor Malls, Hotels, Spas, Restaurants, Patios, Amusement Parks
- Black or White
- 5 Year Warranty

GENERAL SPECS	703i
Description:	4", 3-Way Speaker
Enclosure:	Aluminum Diecast
Outdoor Rated (All Weather):	Yes
Selectable Switch:	70 V and 8 Ω Combination
70 V Transformer Taps:	2.5, 5, 10, 15 Watts
Sensitivity (1W / 1M):	88 dB
Power Handling at 8 Ω:	100 W Max., 50 W Nom.
Frequency Response:	90 Hz - 20 kHz
Crossover:	9 kHz
Dispersion:	140°
Woofer Diameter:	4"
Woofer Material:	Paper Coated / Rubber Surround
Tweeter(s):	2 Each
Tweeter Size:	0.6" (15 mm) Piezo / 0.5" (13 mm) Dome
Tweeter Material:	PEI
Grill Material:	Aluminum
Dimensions (H x W x D):	7" x 4.5" x 4"
Weight:	4.7 Lbs.
"U" Mount Bracket:	Included
Color(s):	Black, White
Warranty:	5 Years

### POLAR CHARTS

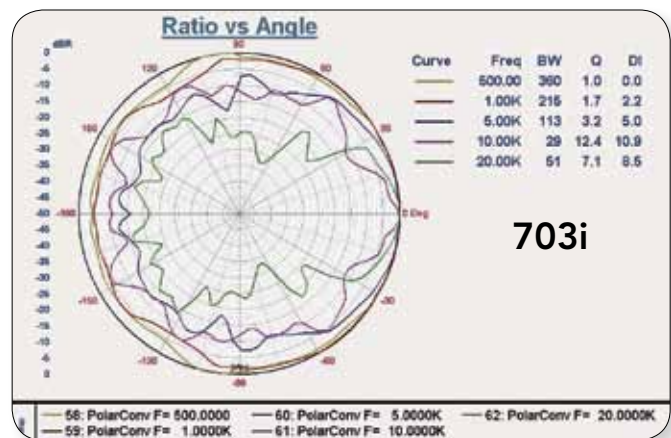

### FREQUENCY RESPONSE CHART



### OPTIONS AVAILABLE



Stake:  
SS36-36" In-Ground Stainless Steel Stake



Attenuators:  
OWI1070M – Mono, 70 V, 10 W Max.  
OWI3570M – Mono, 70 V, 35 W Max.  
OWI7570M – Mono, 70 V, 75 W Max.  
OWI2570S – Stereo, 70 V, 25 W Max.



Volume Controls:  
25WPVC – 25 W, Waterproof, Impedance Matching  
72WPVC – 72 W, Waterproof, Impedance Matching



**OWI, Inc.**

17141 Kingsview Ave.  
Carson, CA 90746 USA

ph. 310.515.1900  
toll free 800.638.1694  
fax 310.515.1606

email info@owi-inc.com  
web www.owi-inc.com