

INNOVATIONS IN SOUND

OWI SPEAKER SYSTEMS & ACCESSORIES

"Success Through Performance, Trust and Value"



AMPLIFIED SPEAKERS




Amplified Multi Voice Coil

- 6.5", 8 Ω or with 70 V/100 V/25 V transformer
- 40 W, 2 source/input with ER paging override
- 15 V DC power supply included
- · Amplifier can drive up to four speakers
- · ADA ready, UL Listed
- · Available in bluetooth models

2x2 Tiles (2x2 Full Grill or 2x2 Tile) Amplified Drop Ceiling Speaker on a 2x2 Full Grill



Amplified Drop Ceiling Speaker on a 2x2 Tile





Amplified Drop Ceiling Speaker

- 8 Ω. 40 W. 2 source/input
- Available in bluetooth models
- 15 V DC power supply included
- · Amplifier can drive up to four speakers
- UL Listed



AMP-HD2SIC5 / AMP-HD2SIC6


- 3 source integratable amplified speaker
- NFPA72 ready with built-in electronic shunt
- · Integrates with life safety
- · Works with talkback paging
- With CAT5 input
 Modular upgrades





Amplified Surface Mount Speakers

- 40 W, 2 source/input
- 15 V DC power supply included
- · Amplifier can drive up to four speakers
- Some models available with bluetooth features



Mercury Pendant Speaker

- 360° sound 180° dispersion
- Available in 6" and 8" speaker models
- 100 W and 150 W power
- Available also in 10" sub
- 70 V/8 Ω selectable switch



Saturn 360 Pendant Speaker

- 360° sound 180° dispersion
- · All weather speaker
- 5", 5 way
- 65 W max power
- 70 V/8 Ω selectable switch



OWI Incorporated was founded in 1978 as a loudspeaker manufacturer. The company's pioneering lines of outdoor/indoor, weatherized or weatherproof speakers are considered the industry standard.

As a company, OWI has expanded its product line of award-winning sophisticated audio equipment for the AV integrators, commercial, industrial and residential markets.

CEILING SPEAKERS



Drop Ceiling Speakers

- · 2-way, full range, co-axial or multi voice coil
- 70 V/8 Ω models / UL Listed
- Available also in 5" or 6"



All-N-One Acoustical Speaker

- Selectable 70 V/100 V/8 Ω
- 2-way, 6.5" with 1" tweeter
- Includes built-in metal housing, T-bar bracket (All-N-One)
- · Works indoor and covered outdoor





BSK - Bathroom/Shower/ Kitchen Speakers

- Water resistant
- 4" and 5" dual cone models
- 30 W max and 40 W max power
- 4 Ω (transformer available)
- New construction kit available

OUTDOOR/INDOOR SPEAKERS



703i Surface Mount Speaker

- Selectable 70 V/8 Ω
- 4", 3-way, 100 W max power
- Outdoor rated (All Weather)
- Aluminum grill





BSK- Bathroom/Shower/ Kitchen Speakers

- · Wate resistant
- 4" and 5" dual cone models
- 30 W max and 40 W max power
- 4 Ω (transformer available)
- · New construction kit available





Trumpet Speaker

- Selectable 70 V/4 Ω
- 4", full range with 60 foot throw
- 80 W max
- Outdoor rated (All Weather)
- Aluminum grill
- Amplified model available



Saturn 360 Pendant Speaker

- 360° sound 180° dispersion
- · All weather speaker
- 5", 5 way
- · 65 W max power
- 70 V/8 Ω selectable switch





Rock and Garden Speakers

- · All weather, rock/garden speakers
- 70 V/8 Ω models
- · UV light resistant, bug, puppy, lawnmower proof
- 6.5" or 4" speaker models



P Series Surface Mount Speakers

- Selectable 70 V/8 Ω
- Available in 5", 6" and 8" ported models
- 40, 45 and 75 W power
- U-mount bracket included
- · Indoor and covered outdoor use

Mercury Pendant Speaker

- 360° sound 180° dispersion
- Available in 6" and 8" speaker models
- 100 W and 150 W power
- Available also in 10" sub

INDOOR

SPEAKERS

P Series Surface Mount

• Available in 5", 6" and 8" ported models

Selectable 70 V/8 Ω

40, 45 and 75 W power
U-mount bracket included
Indoor and covered outdoor use

• 70 V/8 Ω selectable switch

OWI is known worldwide for its outdoor/indoor speakers, rock and landscape garden speaker collections, self-amplified in-ceiling and trumpet speakers, infrared wireless microphone system, media control, shower speakers and many other innovative audio products.



www.owi-inc.com

Specification sheets available for download under "products"

MINI AMPLIFIERS



In-Wall Digital Amplifier

- Robust Digital Class D amplifier
- · 4 audio inputs
- · 1 audio line output
- · IR remote control included



Amplifier on a Double Gang Box

- 8 Ω, 40 W, 1 source/input
- 15 V DC power supply included
- Amplifier can drive up to 4 speakers
- UL Listed



Digital Mini Amplifier/Mixer


- 70 V/100 V model Switchable 70 V or 100 V Mono audio output at 40 W 1 digital audio input (optical) 2 stereo audio inputs
- 4Ω model
 - $2 \times 20 \text{ W}$ at 4Ω output 2 stereo audio inputs Line audio output (3.5 mm)

CONTROL MIXER




Media Control Mixer

- 6 inputs total
- Selectable mic or line level inputs on two
- 2 each, 3.5 mini front inputs
- · Balanced line outputs
- · CAT5 dongle available

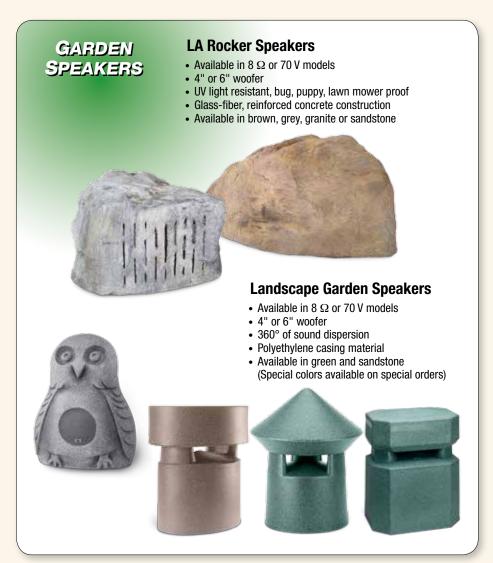



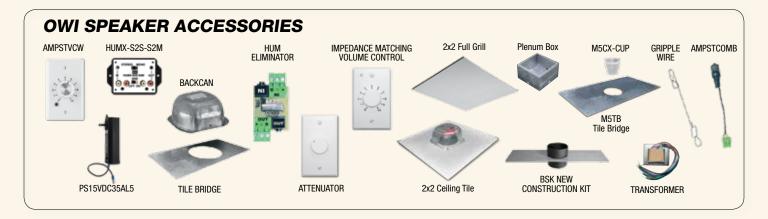

For more information on OWI Incorporated and to view the entire product line, visit our products page by scanning the code at right on your smart phone.



